# **LED 3W AZUL**








CUSTOMER APPOVED SIGNATURES	SALES	APPROVED	CHECKED	PREPARED
	APPROVED	BY	BY	BY

### **Mechanical Dimensions**

#### Lambertian

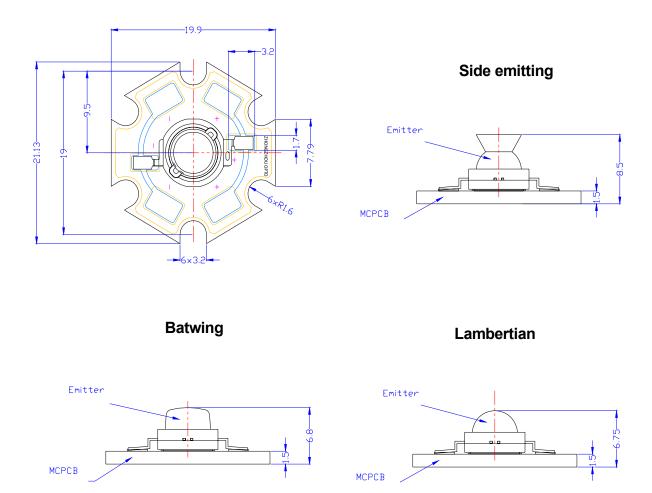

#### Notes:

- 1. All dimensions are in millimeters.
- 2. All dimensions without tolerances are for reference only.
- 3. The package material of the body is heat-resistance polymer, and the plating material of the lead frame is Ag.

#### 1. Typical Electrical & Optical Characteristics at $I_F=^{\circ}$ 350mA, $T_A$ = 25 $\boxtimes$

Parameter	Cymhol	Value				Unit	
Parameter	Symbol	Min.	Ту	p.	Max.	Unit	
Luminous Flux	Фу	-	22		-	lm	
Dominant Wavelength	W <sub>D</sub>	-	467		-	nm	
CRI	Ra	-	80		-	-	
Forward Voltage	V <sub>F</sub>	-	3.3		-	V	
View Angle	20 1/2	Lambertian		140°	deg.		
Thermal resistance	R <sub>J-B</sub>	18			⊠ /W		

#### 2. Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	
Forward Current	I <sub>F</sub>	1000	mA	
Power Dissipation	P <sub>D</sub>	3.3	W	
Junction Temperature	TJ	125	×	
Operating Temperature	T <sub>opr</sub>	-30~100	×	
Storage Temperature	T <sub>stg</sub>	-30~120	×	
ESD Sensitivity	-	1000	V HBM	

#### Notes:

1. The measured value is tested by an integrator system.

2. Tolerance of measurement of luminous flux ±15%

3. Tolerance of measurement of CCT ±5%

4. Tolerance of measurement of forward voltage ±0.05V

5. R is measured with an Xpower Star PCB.

6. Do not drive at rated current more than 5 sec. without heatsink for Xpower emitter series.

## Wavelength Characteristics, T<sub>A</sub>=25⊠

Fig.1 RELATIVE INTENSITY VS. WAVELENGTH




Fig.2 FORWARD CURRENT DERATING CURVE




Fig.3 FORWARD CURRENT VS. FORWARD VOLTAGE




Fig.4 RELATIVE LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE





Fig.5 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT (at Tj=25°C) 2.0



10° 30° RELATIVE RADIANT INTENSITY 1.0 0.9 50° 60° 0.8 70° 80° 90°

Fig.6 RADIATION DIAGRAM